




**COMANSA**


**LC-5211**

**11,020 lbs.**

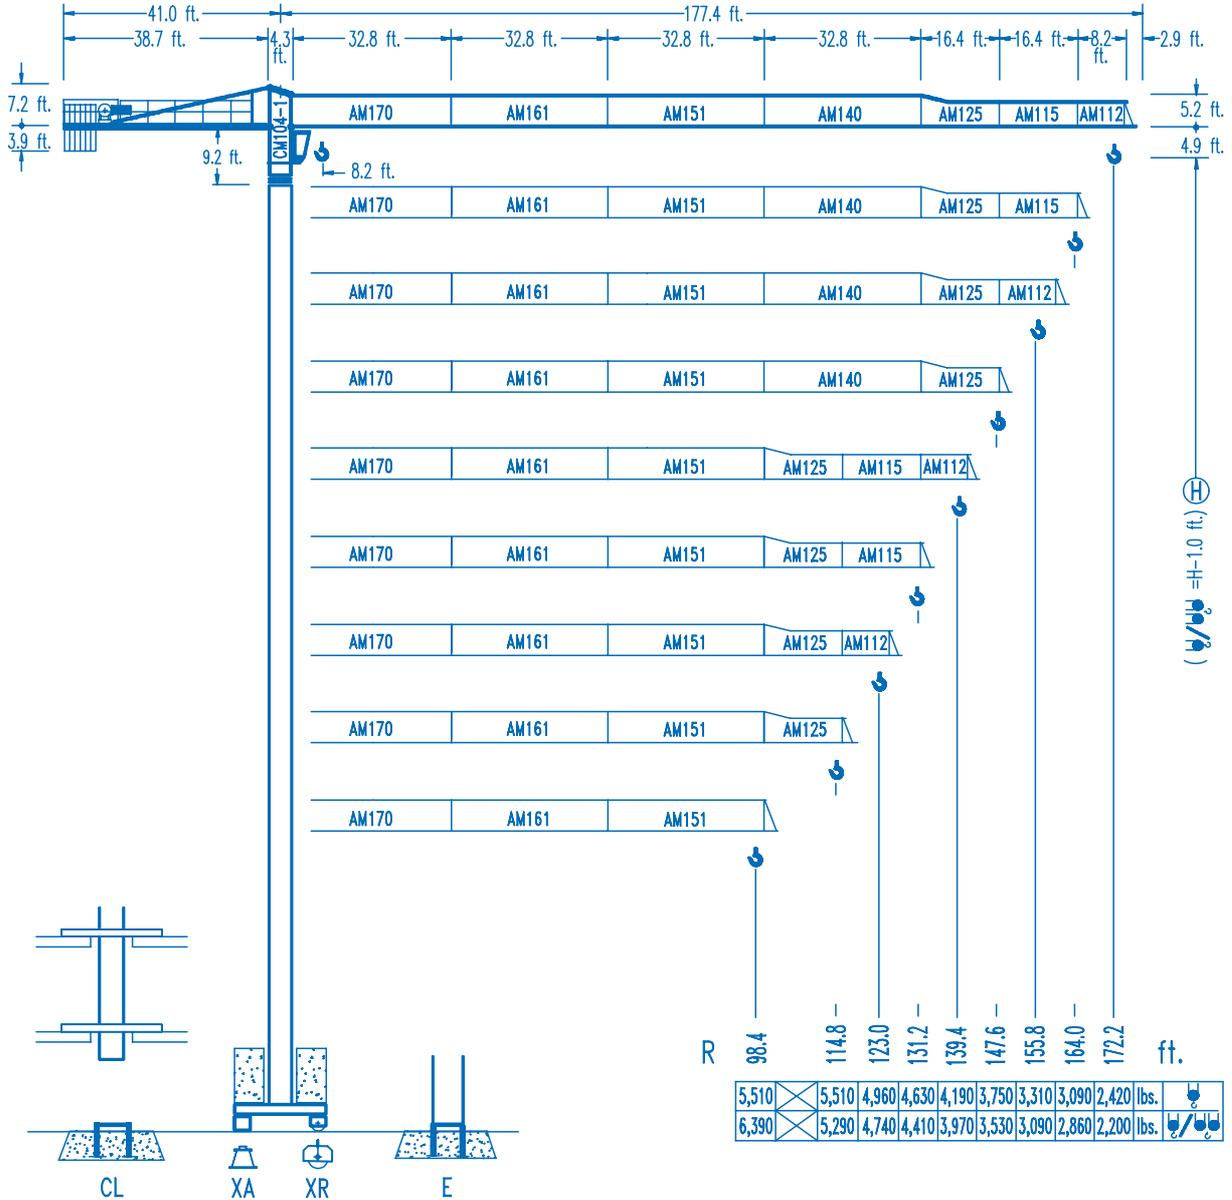

**CE**  
DIN 15018 H1 B3



R	R(Cmax)	Cmax	65.6	82.0	98.4	114.8	123.0	131.2	139.4	147.6	155.8	164.0	172.2	ft.
172.2	87.9 ft. 46.6 ft.	5,510 11,020	5,510 7,450	5,510 5,730	4,830 4,580	4,010 3,790	3,700 3,480	3,420 3,200	3,170 2,950	2,950 2,730	2,750 2,530	2,580 2,360	2,420 2,200	
164.0	101.0 ft. 53.5 ft.	5,510 11,020	5,510 8,730	5,510 6,740	5,510 5,540	4,740 4,520	4,360 4,140	4,060 3,830	3,770 3,550	3,500 3,280	3,280 3,060	3,090 2,860		
155.8	101.4 ft. 53.5 ft.	5,510 11,020	5,510 8,770	5,510 6,790	5,510 5,470	4,760 4,540	4,390 4,170	4,080 3,860	3,790 3,570	3,530 3,310	3,310 3,090			
147.6	106.3 ft. 56.1 ft.	5,510 11,020	5,510 9,260	5,510 7,160	5,510 5,800	5,050 4,830	4,650 4,430	4,320 4,100	4,010 3,790	3,750 3,530				
139.4	110.2 ft. 58.4 ft.	5,510 11,020	5,510 9,650	5,510 7,470	5,510 6,040	5,240 5,020	4,850 4,630	4,500 4,280	4,190 3,970					
131.2	112.8 ft. 59.7 ft.	5,510 11,020	5,510 9,920	5,510 7,690	5,510 6,210	5,400 5,180	4,980 4,760	4,630 4,410						
123.0	112.2 ft. 59.4 ft.	5,510 11,020	5,510 9,850	5,510 7,650	5,510 6,170	5,380 5,160	4,960 4,740							
114.8	114.8 ft. 60.7 ft.	5,510 11,020	5,510 10,090	5,510 7,850	5,510 6,350	5,510 5,290								
98.4	98.4 ft. 61.0 ft.	5,510 11,020	5,510 10,160	5,510 7,890	5,510 6,390									

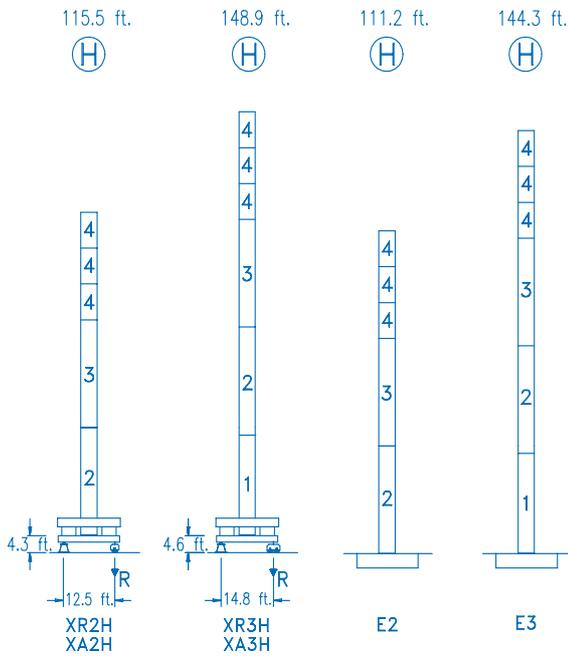

N	Ref.	h
1	MT123	33.1 ft.
2	MH124A	38.7 ft.
3	MH124	38.7 ft.
4	MH121	9.8 ft.
9	CL20	7.2 ft.

MH124=(4)MH121-0.6 ft.

	H=H+0.6 ft.
	H=H
	H=H
	H=H-0.6 ft.

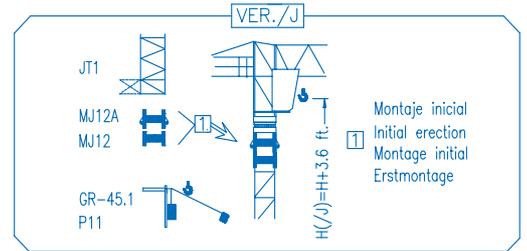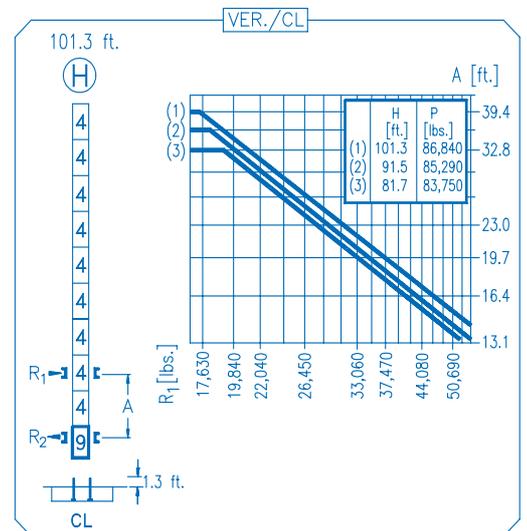

<b>R. máx.</b>	En servicio In operation En service In Betrieb	<b>XR2H ..... 96,650 lbs.</b>
		<b>XR3H .... 144,620 lbs.</b>

<b>R. máx.</b>	Fuera de servicio Out of service Hors service Ausser Betrieb	<b>XR2H ..... 89,730 lbs.</b>
		<b>XR3H .... 101,630 lbs.</b>

**CS2-1.9**  
3 hp.  
66 ft./min  
189 ft./min

**CFU-2.2**  
3 hp.  
0 262 ft./min

**GR-9.0**  
66 ft.lbs.  
0 0,8 rpm

TS2-4.5	TS2-5.5
2x33 ft.lbs.	2x40 ft.lbs.
0  78 ft./min	
XR2H	XR3H

**ES3-18-12**  
29 hp.

	I	II	III
	32	126	252
	5,510	5,510	2,860
	16	63	126
	11,020	11,020	5,730

**EFU2-18-12**  
24 hp.

Graph 1: Flow rate (ft./min) vs. Pressure (lbs.)

Flow rate (ft./min)	Pressure (lbs.)
131	5,510
197	3,310
249	2,420

Graph 2: Flow rate (ft./min) vs. Pressure (lbs.)

Flow rate (ft./min)	Pressure (lbs.)
66	11,020
98	8,820
125	4,850

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	<b>480 V</b> <b>3 ph</b> <b>60 Hz</b>
--	---

Opcional Optional En option Kaufoption	<b>*</b>
---	----------